

Notification – Barangaroo

24 November 2017

Sydney Metro is Australia’s biggest public transport project. It will transform Sydney, delivering more trains and faster services for customers across the network.

Sydney Metro City & Southwest extends the new metro network from the end of Sydney Metro Northwest at Chatswood, under Sydney Harbour, through new railway stations in the CBD and west to Bankstown – a total of 66 kilometres of metro rail.

When services start in 2024, there will be a train at least every four minutes in the peak – customers won’t need a timetable, they’ll just turn up and go.

John Holland CPB Ghella Joint Venture (JHCPBG) has been contracted to deliver the \$2.81 billion tunnelling and station excavation works.

Out-of-hours works – Barangaroo Station site

Works to construct the new metro station at Barangaroo are underway. The following out-of-hours works are scheduled to take place between **Wednesday 29 November and Wednesday 20 December 2017 from 8pm to 5am**, weather and site conditions permitting (see map overleaf). These works need to be done outside of standard construction hours due to high daytime traffic volumes along Hickson Road and to ensure pedestrian and motorist safety.

Out-of-hours work will occur on a maximum of three nights per week in a particular location with a maximum of 10 nights per month.

Location	Out-of-hours works
Hickson Road (between Munn Street overpass and High Steps)	<ul style="list-style-type: none"> • Installing concrete road barriers and temporary fencing along the eastern and western side of Hickson Road • Marking road lines along the western side of Hickson Road • Installing new traffic signs • Removing trees on the western side of Hickson Road • Inserting rock bolts into the High Street heritage wall to secure the wall before the start of excavation works. Drilling activities will be undertaken during normal work hours • Utility investigations and relocation works near High Steps and the Munn Street overpass, involving excavation and trenching activities • Modifying kerb and pedestrian island near the Munn Street overpass • Large vehicle delivery to Hickson Road eastern works area, near the Munn Street overpass

The works will involve:


- Establishing traffic and pedestrian management, including traffic controllers to assist motorists
- Establishing the works area, including safety and environmental controls
- Delivering plant and equipment
- Reinstating any excavated areas
- Demobilising the worksite.

What to expect

- Due to the nature of the works, some of these activities will be noisy. Where possible, high noise works are being carried out during standard construction hours. High noise works required during these out-of-hours activities will be completed by midnight.
- Non-tonal reversing beepers will be used and equipment and vehicles will be turned off when not in use. Workers will be instructed to keep noise to a minimum and lighting equipment will be directed away from residents.
- Equipment used during the out-of-hours works includes trucks, excavators, drilling equipment, lighting, jackhammers, mobile crane, concrete saws and chainsaws, light vehicles and vacuum excavation trucks.
- Traffic control and directional signage will be in place for the safety of workers and the community.

Thank you for your cooperation while we carry out these essential works.

Out-of-hours works - Barangaroo

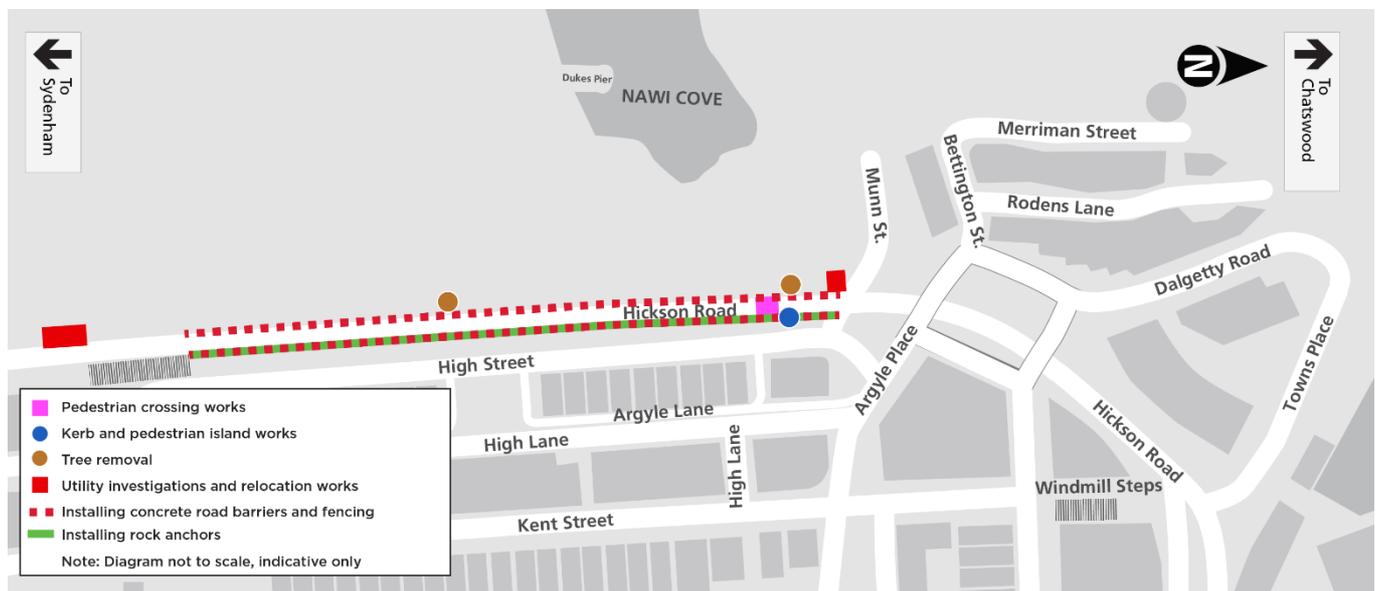

Contact us

For more information, enquiries or complaints please contact us at:

📞 **1800 171 386** 24-hour community information line

✉️ tunnels@transport.nsw.gov.au

🌐 sydneymetro.info

👍 www.facebook.com/SydneyMetro

📮 **Sydney Metro** PO Box K659, Haymarket, NSW 1240

🗣️ If you need an interpreter, call TIS National on **131 450** and ask them to call **1800 171 386**

SMCSWTSE-JCG-SBR-SH-NFS-030094